

MD(P)

()

产品概述

20

ZL 201420400918.0


性能范围

100-1800m³/h

110-520m



型号意义

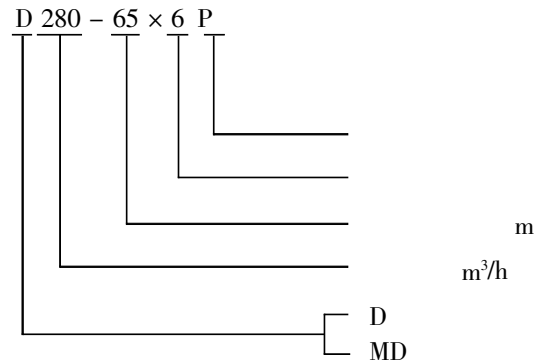

结构说明

主要用途

2

30 / 20% 0.5 80°C 8000

主要零部件材质

Si Mn Mo

ZGSiMnMo

HB360-400

MD(P)

()

Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH)r (m)
		(m³/h)	(L/s)					
D46- 50 P MD46- 50 P	3	30	8.34	166.5	54	2950	37	2.5
		46	12.78	150	64.2			
		55	15.3	138	64			
	4	30	8.34	222	54		45	2.5
		46	12.78	200	64.2			
		55	15.3	184	64			
	5	30	8.34	277.5	54		55	2.5
		46	12.78	250	64.2			
		55	15.3	230	64			
	6	30	8.34	333	54		75	2.5
		46	12.78	300	64.2			
		55	15.3	276	64			
7	30	8.34	388.5	54	75	2.5		
	46	12.78	350	64.2				
	55	15.3	322	64				
8	30	8.34	440	54	90	2.5		
	46	12.78	400	64.2				
	55	15.3	368	64				
9	30	8.34	499.5	54	110	2.5		
	46	12.78	450	64.2				
	55	15.3	414	64				
10	30	8.34	555	54	110	2.5		
	46	12.78	500	64.2				
	55	15.3	460	64				
11	30	8.34	610.5	54	132	2.5		
	46	12.78	550	64.2				
	55	15.3	506	64				
12	30	8.34	666	54	132	2.5		
	46	12.78	600	64.2				
	55	15.3	552	64				
D46- 80 P MD46- 80 P	3	36	10	251	50	2950	75	3.9
		46	12.78	240	58			
		62	17.22	205	56			
	4	36	10	335	50		90	3.9
		46	12.78	320	58			
		62	17.22	273	56			
	5	36	10	418	50		110	3.9
		46	12.78	400	58			
		62	17.22	341	56			
	6	36	10	502	50		132	3.9
		46	12.78	480	58			
		62	17.22	409	56			
7	36	10	586	50	160	3.9		
	46	12.78	560	58				
	62	17.22	477	56				
8	36	10	669	50	160	3.9		
	46	12.78	640	58				
	62	17.22	545	56				
9	36	10	753	50	200	3.9		
	46	12.78	720	58				
	62	17.22	614	56				
10	36	10	836	50	220	3.9		
	46	12.78	800	58				
	62	17.22	628	56				
11	36	10	920	50	250	3.9		
	46	12.78	880	58				
	62	17.22	750	56				
12	36	10	1004	50	280	3.9		
	46	12.78	960	58				
	62	17.22	818	56				
D60- 50 P MD60- 50 P	3	40	11.1	168	67	2950	45	4.0
		60	16.67	150	73			
		72	20	135	71			
	4	40	11.1	224	67		55	4.0
		60	16.67	200	73			
		72	20	180	71			
	5	40	11.1	280	67		75	4.0
		60	16.67	250	73			
		72	20	225	71			
	6	40	11.1	336	67		90	4.0
		60	16.67	300	73			
		72	20	270	71			
7	40	11.1	392	67	90	4.0		
	60	16.67	350	73				
	72	20	315	71				
8	40	11.1	448	67	110	4.0		
	60	16.67	400	73				
	72	20	360	71				
9	40	11.1	504	67	132	4.0		
	60	16.67	450	73				
	72	20	405	71				
10	40	11.1	560	67	160	4.0		
	60	16.67	500	73				
	72	20	450	71				

Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH)r (m)
		(m³/h)	(L/s)					
D85- 45 P MD85- 45 P	3	54	15	150	62	2950	55	2.9
		85	23.6	135	72.4			
		97	27	120	70			
	4	54	15	200	62		75	2.9
		85	23.6	180	72.4			
		97	27	160	70			
	5	54	15	250	62		90	2.9
		85	23.6	225	72.4			
		97	27	200	70			
	6	54	15	300	62		110	2.9
85		23.6	270	72.4				
97		27	240	70				
7	54	15	350	62	132	2.9		
	85	23.6	315	72.4				
	97	27	280	70				
8	54	15	400	62	160	2.9		
	85	23.6	360	72.4				
	97	27	320	70				
9	54	15	450	62	160	2.9		
	85	23.6	405	72.4				
	97	27	360	70				
10	54	15	500	62	200	2.9		
	85	23.6	450	72.4				
	97	27	400	70				
D85- 67 P MD85- 67 P	3	55	15.28	222	54	2950	90	3.3
		85	23.61	201	69			
		100	27.78	183	65			
	4	55	15.28	296	54		110	3.3
		85	23.61	268	69			
		100	27.78	244	65			
	5	55	15.28	370	54		132	3.3
		85	23.61	335	69			
		100	27.78	305	65			
	6	55	15.28	444	54		160	3.3
85		23.61	402	69				
100		27.78	366	65				
7	55	15.28	518	54	200	3.3		
	85	23.61	469	69				
	100	27.78	427	65				
8	55	15.28	592	54	220	3.3		
	85	23.61	536	69				
	100	27.78	488	65				
9	55	15.28	666	54	250	3.3		
	85	23.61	603	69				
	100	27.78	549	65				
10	55	15.28	740	54	315	3.3		
	85	23.61	670	69				
	100	27.78	610	65				
D85- 80 P MD85- 80 P	3	54	15.0	264	53	2950	110	4.2
		85	23.6	240	67			
		108	30.0	210	66			
	4	54	15.0	352	53		132	4.2
		85	23.6	320	67			
		108	30.0	280	66			
	5	54	15.0	440	53		160	4.2
		85	23.6	400	67			
		108	30.0	350	66			
	6	54	15.0	528	53		200	4.2
		85	23.6	480	67			
		108	30.0	420	66			
7	54	15.0	616	53	250	4.2		
	85	23.6	560	67				
	108	30.0	490	66				
8	54	15.0	704	53	280	4.2		
	85	23.6	640	67				
	108	30.0	560	66				
9	54	15.0	792	53	355	4.2		
	85	23.6	720	67				
	108	30.0	630	66				
10	54	15.0	880	53	355	4.2		
	85	23.6	800	67				
	108	30.0	700	66				
11	54	15.0	968	53	400	4.2		
	85	23.6	880	67				
	108	30.0	770	66				
12	54	15.0	1056	53	400	4.2		
	85	23.6	960	67				
	108	30.0	840	66				

MD(P)

()

Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH) _r (m)	Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH) _r (m)
		(m ³ /h)	(L/s)								(m ³ /h)	(L/s)					
D155- 30 P	3	100	27.8	97.5	64	1480	75	3.2	D280- 43 P	3	185	51.39	141	69	1480	160	3.0
		155	43	90	75			280			77.78	129	77	4.7			
		185	51.4	82.5	75			335			93.06	114	75	6.0			
MD155- 30 P	4	100	27.8	130	64	1480	90	3.2	MD280- 43 P	4	185	51.39	188	69	1480	220	3.0
		155	43	120	75			280			77.78	172	77	4.7			
		185	51.4	110	75			335			93.06	152	75	6.0			
D155- 67 P	5	100	27.8	162.5	64	2950	110	3.2	D280- 65 P	5	185	51.39	235	69	1480	280	3.0
		155	43	150	75			280			77.78	215	77	4.7			
		185	51.4	137.5	75			335			93.06	190	75	6.0			
MD155- 67 P	6	100	27.8	195	64	2950	132	3.2	MD280- 65 P	6	185	51.39	282	69	1480	315	3.0
		155	43	180	75			280			77.78	258	77	4.7			
		185	51.4	165	75			335			93.06	228	75	6.0			
D216- 25 P	7	100	27.8	227.5	64	1480	160	3.2	D300- 65 P	7	185	51.39	329	69	1480	355	3.0
		155	43	210	75			280			77.78	301	77	4.7			
		185	51.4	192.5	75			335			93.06	266	75	6.0			
MD216- 25 P	8	100	27.8	260	64	1480	200	3.2	MD300- 65 P	8	185	51.39	376	69	1480	400	3.0
		155	43	240	75			280			77.78	344	77	4.7			
		185	51.4	220	75			335			93.06	304	75	6.0			
D280- 43 P	9	100	27.8	292.5	64	2950	200	3.2	D300- 65 P	9	185	51.39	423	69	1480	450	3.0
		155	43	270	75			280			77.78	387	77	4.7			
		185	51.4	247.5	75			335			93.06	342	75	6.0			
MD280- 43 P	10	100	27.8	325	64	2950	220	3.2	MD300- 65 P	10	185	51.39	470	69	1480	560	3.0
		155	43	300	75			280			77.78	430	77	4.7			
		185	51.4	275	75			335			93.06	380	75	6.0			
D280- 65 P	11	100	27.8	357.5	64	2950	250	3.2	D300- 65 P	11	210	58.33	209.1	64	1480	280	2.2
		155	43	330	75			280			77.78	198.75	73.9	3.35			
		185	51.4	302.5	75			340			94.44	184.2	71	4.3			
MD280- 65 P	12	100	27.8	390	64	2950	280	3.2	D300- 65 P	12	210	58.33	278.8	64	1480	355	2.2
		155	43	360	75			280			77.78	265	73.9	3.35			
		185	51.4	330	75			340			94.44	245.6	71	4.3			
D300- 65 P	3	100	27.8	228	64	1480	132	3.2	MD300- 65 P	3	240	66.7	204	74	1480	280	4
		155	43	201	75			280			77.78	331.25	73.9	4.2			
		185	51.4	177	72			340			94.44	307	71	5			
MD300- 65 P	4	100	27.8	304	64	1480	200	3.2	D300- 65 P	4	240	66.7	272	74	1480	355	4
		155	43	268	75			280			77.78	397.5	73.9	4.2			
		185	51.4	236	72			340			94.44	368.4	71	5			
D300- 65 P	5	100	27.8	380	64	2950	220	3.2	MD300- 65 P	5	240	66.7	340	74	1480	450	4
		155	43	335	75			280			77.78	463.75	73.9	4.2			
		185	51.4	295	72			340			94.44	429.8	71	5			
MD300- 65 P	6	100	27.8	465	64	2950	280	3.2	D300- 65 P	6	240	66.7	408	74	1480	500	4
		155	43	402	75			280			77.78	530	73.9	4.2			
		185	51.4	354	72			340			94.44	491.2	71	5			
D300- 65 P	7	100	27.8	532	64	1480	315	3.2	MD300- 65 P	7	240	66.7	476	74	1480	630	4
		155	43	469	75			280			77.78	596.25	73.9	4.2			
		185	51.4	413	72			340			94.44	552.6	71	5			
MD300- 65 P	8	100	27.8	608	64	2950	355	3.2	D300- 65 P	8	240	66.7	544	74	1480	710	4
		155	43	536	75			280			77.78	662.5	73.9	4.2			
		185	51.4	472	72			340			94.44	614	71	5			
D300- 65 P	9	100	27.8	684	64	2950	450	3.2	MD300- 65 P	9	240	66.7	612	74	1480	800	4
		155	43	603	75			280			77.78	728.8	73.9	4.2			
		185	51.4	531	72			340			94.44	675.4	71	5			
MD300- 65 P	10	100	27.8	760	64	2950	500	3.2	D300- 65 P	10	240	66.7	680	74	1480	900	4
		155	43	670	75			280			77.78	766.7	73.9	4.2			
		185	51.4	590	72			340			94.44	715.4	71	5			
D300- 65 P	3	150	41.7	88.5	72	1480	75	3.0	MD300- 65 P	3	300	83.3	195	76	1480	280	4
		216	60	75	78.2			360			100	183	74	4.2			
		260	72.2	67.5	75			360			100	244	74	5			
MD300- 65 P	4	150	41.7	118	72	1480	90	3.0	D300- 65 P	4	300	83.3	260	76	1480	355	4
		216	60	100	78.2			360			100	305	74	4.2			
		260	72.2	90	75			360			100	366	74	5			
D300- 65 P	5	150	41.7	147.5	72	1480	110	3.0	MD300- 65 P	5	300	83.3	325	76	1480	450	4
		216	60	125	78.2			360			100	366	74	4.2			
		260	72.2	112.5	75			360			100	408	74	5			
MD300- 65 P	6	150	41.7	177	72	1480	132	3.0	D300- 65 P	6	300	83.3	408	74	1480	500	4
		216	60	150	78.2			360			100	455	76	4.2			
		260	72.2	135	75			360			100	427	74	5			
D300- 65 P	7	150	41.7	206.5	72	1480	160	3.0	MD300- 65 P	7	300	83.3	544	74	1480	630	4
		216	60	175	78.2			360			100	488	76	4.2			
		260	72.2	157.5	75			360			100	488	74	5			
MD300- 65 P	8	150	41.7	236	72	1480	185	3.0	D300- 65 P	8	300	83.3	612	74	1480	710	4
		216	60	200	78.2			360			100	585	76	4.2			
		260	72.2	180	75			360			100	549	74	5			
D300- 65 P	9	150	41.7	265.5	72	1480	200	3.0	MD300- 65 P	9	300	83.3	680	74	1480	800	4
		216	60	225	78.2			360			100	650	76	4.2			
		260	72.2	202.5	75			360			100	610	74	5			
MD300- 65 P	10	150	41.7	295	72	1480	220	3.0	D300- 65 P	10	300	83.3	748	74	1480	900	4
		216	60	250	78.2			360			100	715	76	4.2			
		260	72.2	225	75			360			100	671	74	5			

MD(P)

()

Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH)r (m)	Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH)r (m)					
		(m³/h)	(L/s)								(m³/h)	(L/s)										
D360- 40 P MD360- 40 P	3	300	83.3	126	77	1480	185	4.65	D580- 60 P MD580- 60 P	1480	3	450	125	198	79	450	5					
		360	100	120	80.4							580	161	180	82			6	7.6			
		440	122.2	106.5	77							666	185	154	80							
	4	300	83.3	168	77		250	4.65			4.7	5.4	4	450	125	262	79	500	5			
		360	100	160	80.4										580	161	240			82	6	7.6
		440	122.2	142	77										666	185	205			80		
	5	300	83.3	210	77		315	4.65			4.7	5.4	5	450	125	325	79	630	5			
		360	100	200	80.4										580	161	300			82	6	7.6
		440	122.2	177.5	77										666	185	262			80		
	6	300	83.3	252	77		400	4.65			4.7	5.4	6	450	125	390	79	800	5			
360		100	240	80.4	580	161			360	82					6	7.6						
440		122.2	213	77	666	185			318	80												
7	300	83.3	294	77	450	4.65	4.7	5.4	7	450	125	454	79	1000	5							
	360	100	280	80.4							580	161	420			82	6	7.6				
	440	122.2	248.5	77							666	185	374			80						
8	300	83.3	336	77	500	4.65	4.7	5.4	8	450	125	518	79	1250	5							
	360	100	320	80.4							580	161	480			82	6	7.6				
	440	122.2	284	77							666	185	438			80						
9	300	83.3	378	77	560	4.65	4.7	5.4	9	450	125	582	79	1250	5							
	360	100	360	80.4							580	161	540			82	6	7.6				
	440	122.2	319.5	77							666	185	502			80						
10	300	83.3	420	77	630	4.65	4.7	5.4	10	450	125	646	79	1250	5							
	360	100	400	80.4							580	161	600			82	6	7.6				
	440	122.2	355	77							666	185	558			80						
D450- 60 P MD450- 60 P	3	335	93.1	195	72	1480	355	3.8	D600- 65 P MD600- 65 P	1480	3	450	125	210	74	450	4.5					
		450	125	180	79.9							600	166.7	195	80			5.0	5.5			
		500	139	171	78							720	200	162	76							
	4	335	93.1	260	72		500	3.8			4.9	6.0	4	450	125	280	74	630	4.5			
		450	125	240	79.9										600	166.7	260			80	5.0	5.5
		500	139	228	78										720	200	216			76		
	5	335	93.1	325	72		630	3.8			4.9	6.0	5	450	125	350	74	800	4.5			
		450	125	300	79.9										600	166.7	325			80	5.0	5.5
		500	139	285	78										720	200	270			76		
	6	335	93.1	390	72		710	3.8			4.9	6.0	6	450	125	420	74	900	4.5			
450		125	360	79.9	600	166.7			390	80					5.0	5.5						
500		139	342	78	720	200			324	76												
7	335	93.1	455	72	800	3.8	4.9	6.0	7	450	125	490	74	1120	4.5							
	450	125	420	79.9							600	166.7	455			80	5.0	5.5				
	500	139	399	78							720	200	378			76						
8	335	93.1	520	72	900	3.8	4.9	6.0	8	450	125	560	74	1250	4.5							
	450	125	480	79.9							600	166.7	520			80	5.0	5.5				
	500	139	456	78							720	200	432			76						
9	335	93.1	585	72	1000	3.8	4.9	6.0	9	450	125	630	74	1400	4.5							
	450	125	540	79.9							600	166.7	585			80	5.0	5.5				
	500	139	513	78							720	200	486			76						
10	335	93.1	650	72	1120	3.8	4.9	6.0	10	450	125	700	74	1600	4.5							
	450	125	600	79.9							600	166.7	650			80	5.0	5.5				
	500	139	570	78							720	200	540			76						
D500- 57 P MD500- 57 P	3	375	125	180	72	1480	355	4.4	D720- 60 P MD720- 60 P	1480	3	550	153	198	76	500	4.9					
		500	139	171	79							720	200	180	80			6.2	7.1			
		550	153	162	78							850	236	162	78.5							
	4	375	125	240	72		500	4.4			5	5.8	4	550	153	264	76	710	4.9			
		500	139	228	79										720	200	240			80	6.2	7.1
		550	153	216	78										850	236	216			78.5		
	5	375	125	300	72		630	4.4			5	5.8	5	550	153	330	76	900	4.9			
		500	139	285	79										720	200	300			80	6.2	7.1
		550	153	270	78										850	236	270			78.5		
	6	375	125	360	72		710	4.4			5	5.8	6	550	153	396	76	1120	4.9			
		500	139	342	79										720	200	360			80	6.2	7.1
550		153	324	78	850	236			324	78.5												
7	375	125	420	72	800	4.4	5	5.8	7	550	153	462	76	1250	4.9							
	500	139	399	79							720	200	420			80	6.2	7.1				
	550	153	378	78							850	236	378			78.5						
8	375	125	480	72	900	4.4	5	5.8	8	550	153	528	76	1400	4.9							
	500	139	456	79							720	200	480			80	6.2	7.1				
	550	153	432	78							850	236	432			78.5						
9	375	125	540	72	1000	4.4	5	5.8	9	550	153	594	76	1600	4.9							
	500	139	513	79							720	200	540			80	6.2	7.1				
	550	153	486	78							850	236	486			78.5						
10	375	125	600	72	1120	4.4	5	5.8	10	550	153	660	76	1800	4.9							
	500	139	570	79							720	200	600			80	6.2	7.1				
	550	153	540	78							850	236	540			78.5						
D800- 60 P MD800- 60 P	3	600	167	198	76	1480	630	5.2	D800- 60 P MD800- 60 P	1480	3	800	222	180	80	630	5.2					
		800	222	162	78.5							960	267	162	78.5			6.8	7.8			
		960	267	162	78.5							600	167	264	76							
	4	600	167	240	80		710	5.2			6.8	7.8	4	600	167	240	80	800	5.2			
		800	222	216	78.5										960	267	216			78.5	6.8	7.8
		960	267	216	78.5										600	167	330			76		
	5	600	167	300	80		800	5.2			6.8	7.8	5	600	167	300	80	1000	5.2			
		800	222	270	78.5										960	267	270			78.5	6.8	7.8
		960	267	270	78.5										600	167	396			76		
	6	600	167	360	80		900	5.2			6.8	7.8	6	600	167	360	80	1250	5.2			
800		222	324	78.5	960	267			324	78.5					6.8	7.8						
960		267	324	78.5	600	167			462	76												
7	600	167	420	80	1000	5.2	6.8	7.8	7	600	167	420	80	1400	5.2							
	800	222	378	78.5							960	267	378			78.5	6.8	7.8				
	960	267	378	78.5							600	167	528			76						
8	600	167	480	80	1120	5.2	6.8	7.8	8	600	167	480	80	1600	5.2							
	800	222	432	78.5							960	267	432			78.5	6.8	7.8				
	960	267	432	78.5							600	167	594			76						
9	600	167	540	80	1250	5.2	6.8	7.8	9	600	167	540	80	1800	5.2							
	800	222	486	78.5							960	267	486			78.5	6.8	7.8				
	960	267	486	78.5							600	167	660			76						
10	600	167	600	80	1250	5.2	6.8	7.8	10	600	167	600	80	2000	5.2							
	800	222	540	80							960	267	600			80	6.8	7.8				
	960	267	540	80							960	267	540			78.5						